


永茂建机
YONGMAO

STT553B
25/20/18t

平頭系列


STT553B
25/20/18t

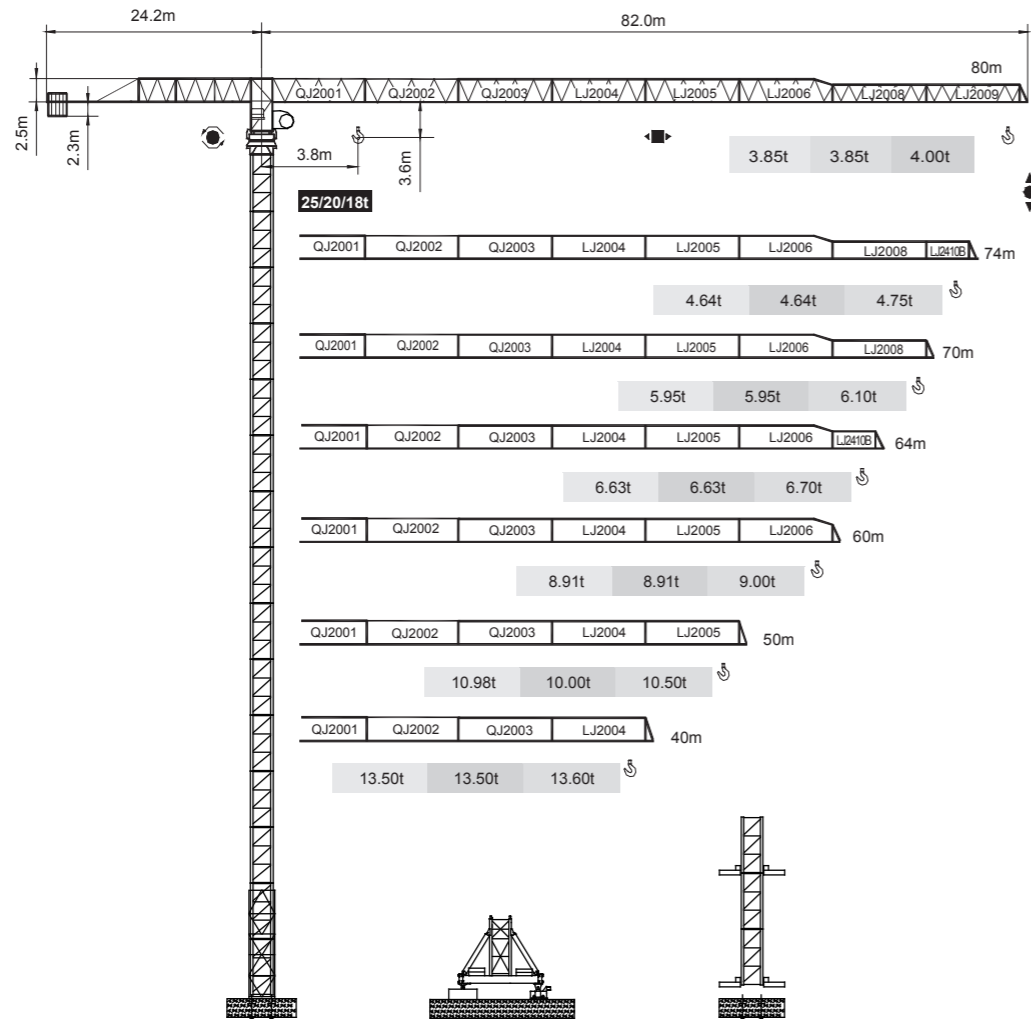

載荷表 Load Chart


25t Q-25-A(B)-T1-V1.0

R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	30	40	44	50	54	60	64	70	74	80
80	UU	15.82	25.00	11.65	8.08	7.12	5.97	5.35	4.58	4.15	3.59	3.27	2.85
	U	30.30	12.50	12.50	9.08	8.12	6.97	6.35	5.58	5.14	4.59	4.27	3.85
74	UU	16.80	25.00	12.57	8.77	7.74	6.52	5.86	5.03	4.57	3.98	3.64	
	U	32.25	12.50	12.50	9.77	8.74	7.52	6.85	6.03	5.57	4.98	4.64	
70	UU	19.26	25.00	14.89	10.49	9.30	7.88	7.12	6.17	5.63	4.95		
	U	37.11	12.50	12.50	11.48	10.30	8.88	8.12	7.16	6.63	5.95		
64	UU	19.26	25.00	14.89	10.49	9.30	7.88	7.12	6.17	5.63			
	U	37.11	12.50	12.50	11.48	10.30	8.88	8.12	7.16	6.63			
60	UU	23.03	25.00	18.44	13.13	11.69	9.99	9.06	7.91				
	U	44.60	12.50	12.50	12.50	12.50	10.98	10.06	8.91				
50	UU	23.03	25.00	18.44	13.13	11.69	9.99						
	U	44.60	12.50	12.50	12.50	12.50	10.98						
40	UU	23.32	25.00	18.94	13.50								
	U	40.00	12.50	12.50	12.50								

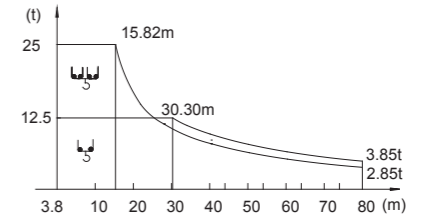

20t Q-20-A(B)-T1-V1.0

R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	30	40	44	50	54	60	64	70	74	80
80	UU	19.14	20.00	11.65	8.08	7.12	5.97	5.35	4.58	4.15	3.59	3.27	2.85
	U	36.81	10.00	10.00	9.08	8.12	6.97	6.35	5.58	5.14	4.59	4.27	3.85
74	UU	20.36	20.00	12.57	8.77	7.74	6.52	5.86	5.03	4.57	3.98	3.64	
	U	39.21	10.00	10.00	9.77	8.74	7.52	6.85	6.03	5.57	4.98	4.64	
70	UU	23.35	20.00	14.89	10.49	9.30	7.88	7.12	6.17	5.63	4.95		
	U	45.14	10.00	10.00	10.00	10.00	8.88	8.12	7.16	6.63	5.95		
64	UU	23.35	20.00	14.89	10.49	9.30	7.88	7.12	6.17	5.63			
	U	45.14	10.00	10.00	10.00	10.00	8.88	8.12	7.16	6.63			
60	UU	27.96	20.00	18.44	13.13	11.69	9.99	9.06	7.91				
	U	54.28	10.00	10.00	10.00	10.00	10.00	10.00	8.91				
50	UU	28.00	20.00	18.44	13.13	11.69	9.99						
	U	50.00	10.00	10.00	10.00	10.00	10.00						
40	UU	29.15	20.00	18.94	13.50								
	U	40.00	10.00	10.00	10.00								

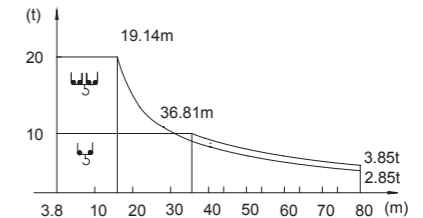

0 0
1 1
5 6

Topless

V 5.0-09012016

Topless STT553B



YONGMAO HOLDINGS LIMITED

Topless STT553B
Topless STT553B





YONGMAO HOLDINGS LIMITED

STT553B

25/20/18t

18t Q-18-A(B)-T1-V1.0

R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	30	40	44	50	54	60	64	70	74	80
80	U	20.60	18.00	11.74	8.40	7.50	6.42	5.84	5.12	4.71	4.19	3.89	3.50
	L	38.70	9.00	9.00	8.68	7.82	6.79	6.24	5.55	5.16	4.66	4.37	4.00
74	U	21.39	18.00	12.59	9.02	8.07	6.93	6.31	5.54	5.12	4.57	4.25	
	L	41.56	9.00	9.00	9.00	8.45	7.35	6.75	6.01	5.59	5.06	4.75	
70	U	25.60	18.00	15.07	10.88	9.75	8.40	7.67	6.76	6.25	5.60		
	L	49.10	9.00	9.00	9.00	9.00	8.82	8.11	7.23	6.74	6.10		
64	U	25.30	18.00	14.88	10.76	9.64	8.31	7.60	6.70	6.20			
	L	48.90	9.00	9.00	9.00	9.00	8.78	8.08	7.19	6.70			
60	U	30.70	18.00	18.00	13.35	11.98	10.33	9.44	8.33				
	L	60.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00				
50	U	30.60	18.00	18.00	13.43	12.10	10.50						
	L	50.00	9.00	9.00	9.00	9.00	9.00						
40	U	30.60	18.00	18.00	13.60								
	L	40.00	9.00	9.00	9.00								

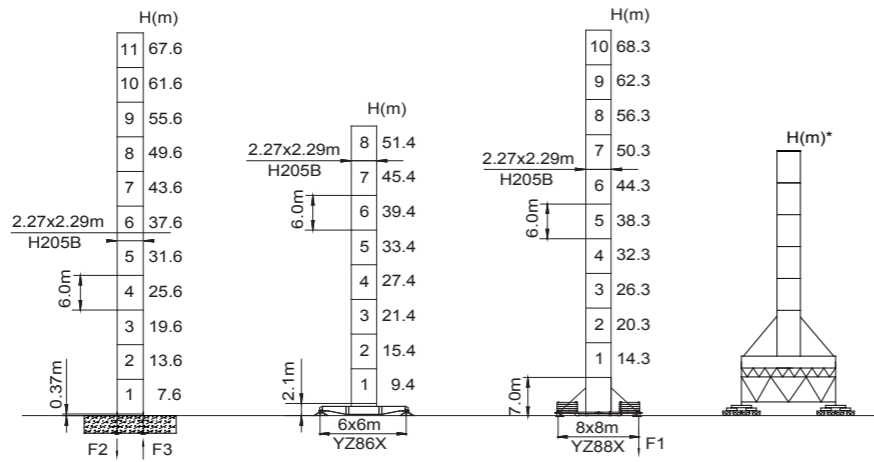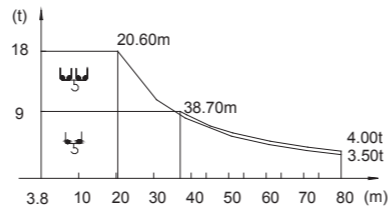

	●	■
F2	280t	289t
F3	183t	203t
	145t	


	●	■
F1	137t	123t
	168t	

Topless STT553B

平頭系列


STT553B

25/20/18t

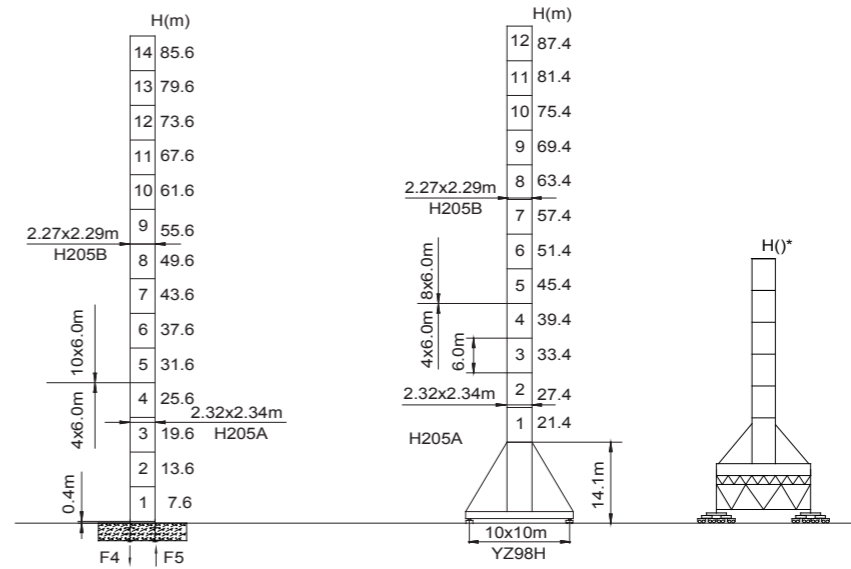

	●	■
F4	325t	443t
F5	216t	347t
	167t	

● 工作狀態支反力 In service reaction ■ 非工作狀態支反力 Out of service reaction
 ⊕ 整機自由高度重量(不含平衡重及壓重重量) Total weight of free standing crane (excludes counter weight & ballast.)

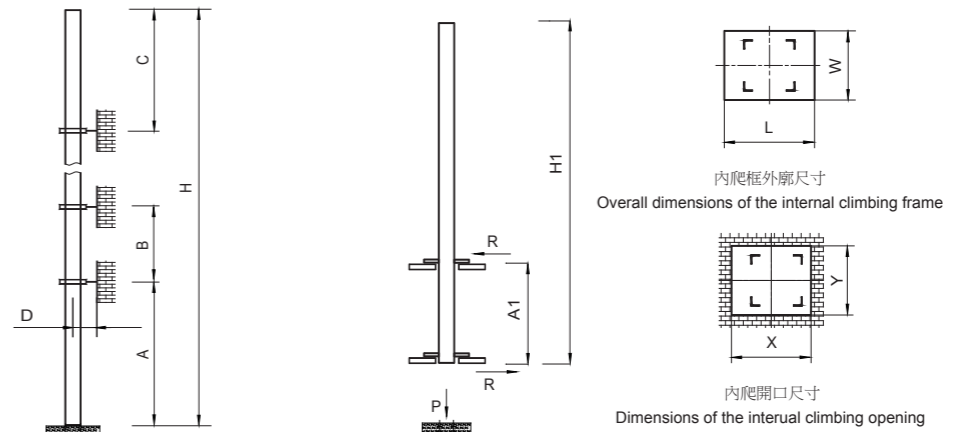

塔身節 Mast	A (m)	B (m)	C (m)	D (m)	H (m)
H205B	57	42	52.6	>4.0	400 >400*

塔身節 Mast	H1 (m)	A1 (m)	P (t)	R (t)	X (m)	Y (m)	L (m)	W (m)
H205B	61.2	20	159	42	3.28	2.4	3.5	3.02

附著道數 Number of tie collars = (H-A-C)/B+1

超過100m高度，需降低載荷，請與公司聯繫。

Load should be reduced when the height exceeds 100m. Please contact Yongmao for details.

0 0
1 1
7 8

Topless STT553B
Topless STT553B



YONGMAO HOLDINGS LIMITED



YONGMAO HOLDINGS LIMITED

STT553B

25/20/18t

STT553B

25/20/18t

平頭系列

主要性能參數 Specification

機構 Mechanism							電動機 Motor kW
		m/min	t	m/min	t		
25t	110LFV63 [☆]	0-38 0-46 0-72	12.5 10.0 4.0	0-19 0-23 0-36	25.0 20.0 8.0	550 m	110
	90LFV63DB1	0-40 0-96 0-160	12.5 4.0 1.0	0-20 0-48 0-80	25.0 8.0 2.0	1030m >1030m [*]	90
20t	90LFV50 [☆]	0-37 0-44 0-75	10.0 8.0 3.0	0-18 0-22 0-37	20.0 16.0 6.0	550m	90
	75LFV50DB1	0-32 0-96 0-150	10.0 3.0 1.0	0-16 0-48 0-75	20.0 6.0 2.0	1030m >1030m [*]	75
18t	75LFV45 [☆]	0-38 0-46 0-76	9.0 6.0 3.0	0-19 0-23 0-38	18.0 12.0 6.0	680 m	75
	75LFV45DB1	0-40 0-96 0-160	9.0 3.0 1.0	0-20 0-48 0-80	18.0 6.0 2.0	1030m >1030m [*]	75
	11 DFV10	0-65 m/min					11
	RTC435 [☆]	0-0.8 rpm					3x145 N·m
	7.5RFCV	0-0.8 rpm					3x145 N·m
	RT	12.5-25 m/min					6x2.6/5.2

電壓 Pressure	kVA
380V (±10%) 50 Hz	90LFV50, 75LFV50DB1, 75LFV45DB1 : 155 90LFV63DB1, 110LFV63 : 180 75LFV45 : 140

* 與製造商聯繫 Contact us, please.
 ☆ 标准配置 Standard configuration.

本技術參數不受法律約束，技術資訊請詳見相應說明書。
 These specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.



YONGMAO HOLDINGS LIMITED



YONGMAO HOLDINGS LIMITED

Topless STT553B
 Topless STT553B